



Commercial stack washer/dryer for on-premises laundry applications

CS10

Dependable & efficient

Washer

- Stainless steel inner and outer drum for long-lasting worry free performance
- Four-compartment soap box for wash, pre-wash, bleach and softener
- Dynamic Balancing System
 - Suspension & out-of-balance logic manages and redistributes unbalanced loads
 - Quiet operation
- High-speed extraction
 - A 1200 RPM extract speed delivers 440 G
- Door opens 180° for easy loading and unloading
- Large capacity
- Ultra-low water use of only 44.3 litres

Dryer

- Superior airflow
 - Fast-drying results with advanced airflow pattern
- Large Capacity
 - Large 7.0 ct. ft. cylinder
- Time savings
 - Large, easy-clean lint filter is located upfront



Control

- Micro-Display control (MDC)
 - Four cycle options
 - Cycle time countdown
 - LED progress indicators
- 5 wash programs with possibility of programming cycle modifier options
 - added prewash
 - extra wash time
 - extra rinse
- 4 drying programs

CS10 electric

CS10 gas


Model	BTEBLASP433AW01	BTGBLASP303AW01
Drum		
Capacity	9,5kg (washer) / 8,2kg (dryer) 96,8L (washer) / 198L (dryer)	9,5kg (washer) / 8,2kg (dryer) 96,8L (washer) / 198L (dryer)
Cylinder volume	198/96.8 l	198/96.8 l
Drum speed		
Spin speed	NA/440 G	NA/440 G
Spin speed	NA/1200 RPM	NA/1200 RPM
Motor		
Motor size	.25/.67 kW	.25/.67 kW
Cabinet		
Cylinder finish	Galvanized/SS	Galvanized/SS
Colours	White	White
Door type (solid/window)	Window	Window
Heating		
Heat sources	Electric	Gas
Heating element	4000 kW	N/A
Connection		
Gas inlet connection	-	9,5 mm
Gas consumption	-	26,38 MJ/hr
Exhaust outlet diameter	102 mm	102 mm
Exhaust airflow	85 litres/sec	85 litres/sec
Operation		
Water temperatures	3	3
Cycles	4/5	4/5
Water consumption per cycle	44,3 l	44,3 l
Water pressure	1.4 - 8.3 bar	1.4 - 8.3 bar
Cycle indicator lights	Y	Y
Power		
Electrical requirements (Voltage/Hz/Phases)	10AMP Washer / 20AMP Dryer 240/50/1	10AMP Washer / 10AMP Dryer 240/50/1
Weight		
Net weight	177 kg	177 kg
Shipping weight	193 kg	193 kg
Dimensions		
Unit dimensions		
Height	1986 mm	1986 mm
Width	683 mm	683 mm
Depth	704 mm	704 mm
Packing dimensions		
Height	2032 mm	2032 mm
Width	737 mm	737 mm
Depth	832 mm	832 mm

* Heights may vary slightly depending on levelling adjustments.

A B C D E F G H I J K L M N O P Q R S

CS10 1678* 1447* 597 213 610 203 391 59 938* 368* 1140* 813 683 1986* 1184* 52 704 38 333*

* With leveling legs turned into base.

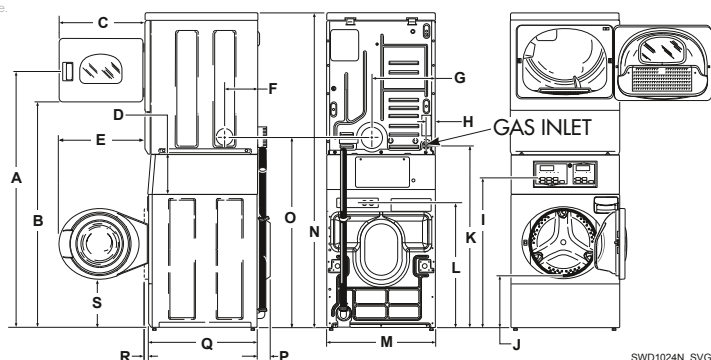

SWD1024N_SVG